



iPhone 6s Plus Taptic Engine Replacement

Replace the Taptic Engine in an iPhone 6s Plus.

Written By: Dante Mazzanti



INTRODUCTION

Follow this guide to replace the Taptic Engine in your iPhone 6s Plus. The Taptic Engine is the iPhone's vibrating and haptic feedback motor. If your phone isn't vibrating or produces a rattling sound when it does, replacing the Taptic Engine can remedy your issues.



TOOLS:

- [P2 Pentalobe Screwdriver iPhone](#) (1)
- [Suction Handle](#) (1)
- [Spudger](#) (1)
- [Tweezers](#) (1)
- [Phillips #000 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)




PARTS:

- [iPhone 6s Plus Vibrator](#) (1)

Step 1 — Pentalobe Screws




 Before disassembling your iPhone, discharge the battery below 25%. A charged lithium-ion battery can catch fire and/or explode if accidentally punctured.

- Power off your iPhone before beginning disassembly.
- Remove the two 3.4 mm Pentalobe screws on either side of the Lightning port.

Step 2 — Opening Procedure



 Opening the display on the 6s Plus separates a thin strip of adhesive around the perimeter of the display. If you prefer to replace the adhesive, have a set of new adhesive strips ready before you continue. It's possible to complete the repair without replacing the adhesive, and you probably won't notice any difference in functionality.

- Apply a suction cup to the lower left corner of the display assembly.

Step 3



- Pull up on the suction cup with firm, constant pressure to create a slight gap between the front panel and rear case.

⚠ Pulling too hard may damage the display assembly. Apply just enough pressure to create a small gap between the display assembly and the rear case.

Step 4



- The safest place to pry from is the notch in the front panel above the headphone jack.
- While still maintaining pressure on the suction cup, insert the flat tip of a spudger into the gap, directly above the headphone jack.

Step 5



- Twist the spudger to widen the gap between the front panel and the rear case.

Step 6



- While firmly pulling up on the suction cup, slide the edge of the spudger under the bottom left corner of the display.

Step 7



- Slide the tip of the spudger up the left side of the phone, between the front panel and the rear case.

Step 8



- Insert the flat tip of the spudger under the right edge of the display.
- Slide the spudger up the right side.

Step 9



- Use a plastic opening tool to hold down the rear case while pulling up the suction cup to open the phone.

⚠ Do **not** remove the display completely, or you will damage the data cables connecting the display near the top edge of the iPhone.



Step 10



- Pull up on the small nub on the suction cup to remove it from the display.

Step 11



- Gently grasp the display assembly and lift it up to open the phone, using the clips at the top of the front panel as a hinge.
 - Open the display to about a 90° angle, and lean it against something to keep it propped up while you're working on the phone.
-  Don't open the display more than 90°—it is still connected to the top of the phone by the display, digitizer, and front camera cables which can tear easily.
- Add a rubber band to keep the display securely in place while you work. This prevents undue strain on the display cables.
-  In a pinch, you can use an unopened canned beverage to support the display.

Step 12 — Battery Connector




- Remove the following Phillips screws securing the battery connector bracket to the logic board:
 - One 2.9 mm screw
 - One 2.3 mm screw

Step 13



- Remove the battery connector bracket.

Step 14

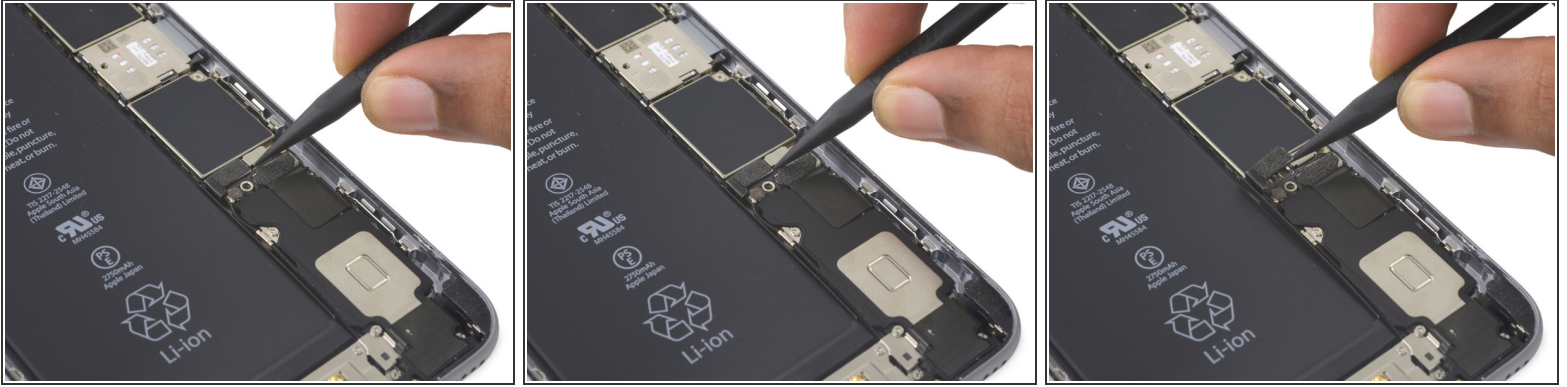

- Use the pointed tip of the spudger to disconnect the battery connector from the logic board.

Step 15



- Bend the connector back to ensure it doesn't make contact and power the iPhone on while you're working on it.

Step 16 — Taptic Engine



- Remove the following Phillips screws over the Taptic Engine cable bracket:
 - Two 3.5 mm screws
 - One 2.7 mm screw

Step 17



- Remove the Taptic Engine cable bracket.

Step 18



- Disconnect the Taptic Engine's flex cable from the socket on the Lightning Connector flex cable.

Step 19



- Remove the following two Phillips screws:
 - One 3.1 mm screw
 - One 2.1 mm screw

Step 20



- Remove the Taptic Engine.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-22 04:20:59 AM.